

DuroPoxy Primer 100

Epoxy Based Durable Floor Coating Primer


Technical Data Sheet

DESCRIPTION

DuroPoxy Primer 100 is a solvent free, non pigmented two component epoxy based primer for Durotech self levelling flooring epoxy systems. This also can be for a primer for polyurethane flooring products medium to heavy industrial wear. **DuroPoxy Primer 100** is used as a primer over dense concrete and cementitious surfaces as the key surface coating and bonding agent suitable for epoxy resin systems. **DuroPoxy Primer 100** is applied to substrates such as concrete and cement screeds.

FEATURES:

- High adhesive strength – creates an extremely good bond to concrete substrates and aggregates
- Lower viscosity
- Excellent cure rate low temperatures
- Chemical resistance
- Excellent adhesion to dry, damp and or dense surfaces
- Multi purpose epoxy primer
- Non flammable
- Very low VOC content

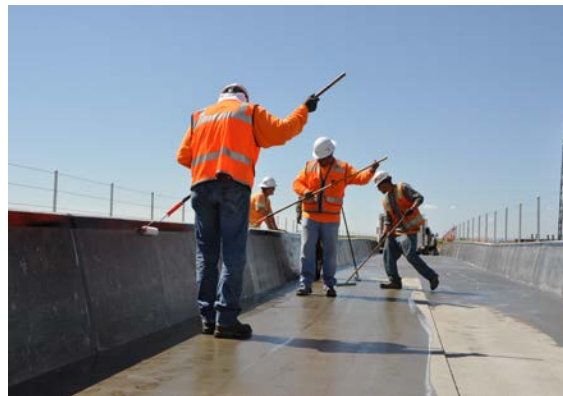

USES:

- Primer for dense concrete
- Mortar
- Screed
- Primer for trafficable epoxy systems
- Primer for polyurethane membranes
- Primer for damp substrates

COMPONENT PROPERTES:

Property	Resin	Hardener
Appearance	Straw to amber colour liquid	Straw to amber colour liquid
Specific gravity g/cm ³	1.16 ± 3	1.03 ± 3
Viscosity @ 25°C	910 ± 50	100 – 300 cps

MIXING AND CURING CONDITIONS:

Property	RESIN / HARDENER
Mix ratio by weight (resin/ weight)	100/50
Solids Content	100%
Mixed specific gravity	1.09 g/cm ³
Work Time (150 grams)	16 ± 3 minutes @ 25°C
Ready for traffic	Less than 8 hours @ 25°C
Recoat time	16 to 24 hours @25°C

Typical Physical Properties:

Property	RESIN / HARDENER
Hardness	89 Shore D
Adhesion to concrete	>1.5 MPa
Service Temp (Max)	100°C

APPLICATION:

Surface Preparation: The surface must be clean and dry and free from loose particles, including dust, grease, coatings and curing compounds and other foreign matter. The substrate must be prepared by any way of degreasing, grinding or captive shot blasting to expose aggregate and provide a profile. Allow floor to dry if degreasing has been carried out, before applying **DuroPoxy Primer 100**.

The compressive strength of substrates shall not be less than 25MPa. A minimum direct tensile pull off is 1.5 MPa. The moisture content of substrate shall not be higher than 8% throughout and the temperature of the substrate must be 3°C above the current dew point.

Mixing: Prior to mixing, the temperature of the components must be between 10-30°C. Pour hardener into the resin container and ensure all contents in the hardener is emptied completely. To achieve a homogeneous mix, both parts must be mechanically stirred with a mixing paddle at about 300-600 rpm. Ensure the mixing device reaches the side and bottom of the vessel and stir for 2 minutes and scrape down the sides of the drum and mix for another 1 to 2 minutes until uniform.

How: After mixing, apply the DuroPoxy Primer 100 to the clean substrate using a brush or roller. The working time is decreased by increase in temperature and lower temperatures will extend the working time. To fully cure the product the substrate temperature must not fall below 5°C in the first 24 hours.

Curing: After application, the DuroPoxy Primer 100 should be protected from direct contact with water for approximately 6 hours at 25 ± 3 °C. The DuroPoxy Primer 100 can be ready for coating after allowing to cure overnight.

ESTIMATING DATA:

The consumption will depend upon substrate condition or type. Apply to give a coverage of 0.2mm thickness per square metre. A second coat of DuroPoxy Primer 100 may be required for porous substrate.

Coverage rate will be approx. 5M² per litre.



STORAGE:

Duropoxy Primer 100 stored in its original sealed containers for up to 12 months in controlled environment. Place out of direct sunlight at temperatures between 15-30°C.

PACKAGING and COLOUR AVAILABILITY:

Duropoxy Primer 100 is supplied as an 8.1L Kit (5.4L Resin / 2.7L Hardener).

Colour: Clear Amber

CLEANING:

Clean the tools and equipment with rags, then wipe off using a solvent such as xylene before the resin system hardens.

PRECAUTIONS:

For the full health and safety hazard information and how to safely handle and use the product, please make sure that you obtain a copy MSDS.



Distributor Cyprus: M. A. Total Build Ltd
149 Arch. Makarios III Avenue, 3021 Limassol, Cyprus

Email: info@totalbuild.com.cy

Tel: +357 99 121841

Fax: +357 25 381403